



MEMS M×N Optical Switch Moudle

Features

- Modular Design
- Non-Blocking Switching
- "any-to-any" switch
- High Reliability and stability



Application

- OADM
- OXC
- Data Center
- Instrumentation

Compliance

- Telcordia GR-1221
- Telcordia GR-1073

Optical Route

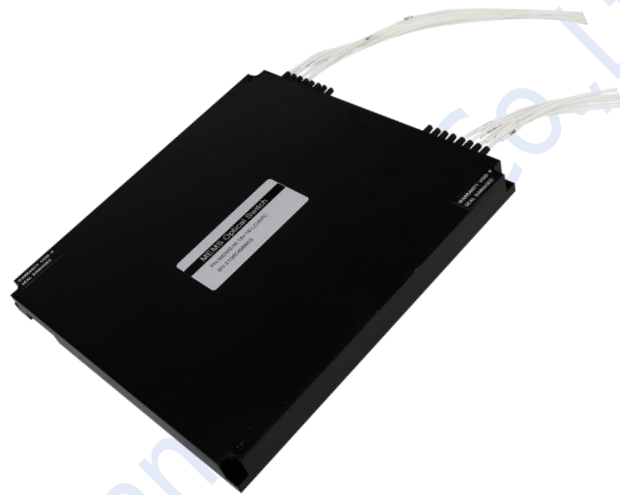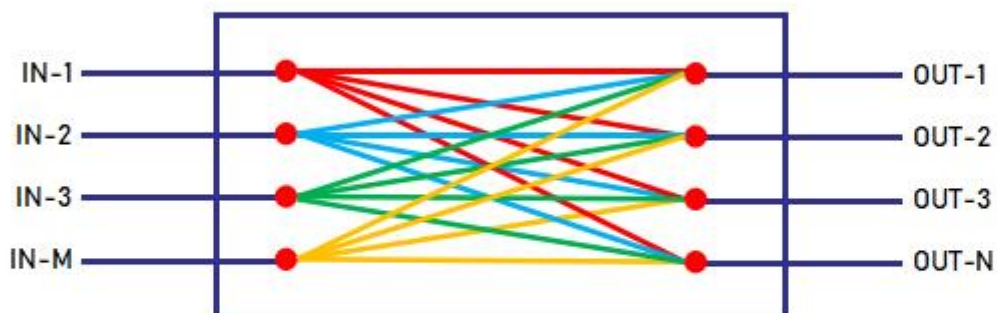



Specifications

Single Mode

Parameters	Unit	MEMS M×N-SM	
Working Wavelength	nm	1260-1650 or780or980or1064....	
Testing Wavelength	nm	1310/1550/1625/1650	
Insertion Loss	dB	@CWL Single-band ≤1.6 (M≤8, N≤8) ≤2.0 (M≤16, N≤16) ≤2.6 (M≤32, N≤32) ≤3.0 (M≤64, N≤64)	@CWL Dual-band ≤2.0 (M≤8, N≤8) ≤2.4 (M≤16, N≤16) ≤3.0 (M≤32, N≤32) ≤3.4 (M≤64, N≤64)
WDL	dB	≤0.6	
PDL	dB	≤0.3	
Return Loss	dB	≥45	
Crosstalk	dB	≥50	
Repeatability	dB	≤±0.1	
Switching Time	ms	≤15 (M≤16, N≤16) ≤50(M≤64, N≤64)	
Durability	times	≥10 ⁹	
Input Optical Power	mW	≤500	
Operating Voltage	V	DC 5V±10%	
Operating Current	A	≤0.8 (M+N≤16) ≤1.0 (M+N≤32) ≤2.0 (M+N≤64) ≤4.0 (M+N≤128)	
Operating Temp.	°C	-5 ~ +75	
Storage Temp.	°C	-40 ~ +85	
Dimension	mm	M5: 110×141×12 (M+N≤16) M6: 200×180×18(M+N≤32) M7: 280×240×32 (M+N≤64) M8:300X400X60(64<M+N≤128)	
1.Within operating temperature and all SOP. 2.Excluding connector. 3.WDL is measured in a ±20nm range at 23°C.			



Multi-Mode

Parameters	Unit	MEMS M×N-MM	
Working Wavelength	nm	850±30, 1310±30	
Testing Wavelength	nm	850/1310	
Insertion Loss	dB	@CWL Single-band ≤1.6 (M≤12, N≤12) ≤2.0 (M≤16, N≤16)	@CWL Dual-band ≤2.0 (M≤12, N≤12) ≤2.4 (M≤16, N≤16)
WDL	dB	≤0.6	
PDL	dB	≤0.4	
Return Loss	dB	≥30	
Crosstalk	dB	≥30	
Repeatability	dB	≤±0.1	
Switching Time	ms	≤15 (M≤8, N≤8) ≤30(M≤16, N≤16)	
Durability	times	≥10 ⁹	
Input Optical Power	mW	≤500	
Operating Voltage	V	DC 5V±10%	
Operating Current	A	≤0.8 (M+N≤16) ≤1.5 (M+N≤32)	
Operating Temp.	°C	-5 ~ +70	
Storage Temp.	°C	-40 ~ +85	
Dimension	mm	M5: 110×141×12mm (M+N≤16) M6: 200×180×18mm (M+N≤24) M7: 280×240×32mm (M+N≤32) customization: 32<M+N≤128	

1.Within operating temperature and all SOP.


2.Excluding connector.

3.WDL is measured in a ±20nm range at 23°C.




Dimension

M5:110×141×12mm

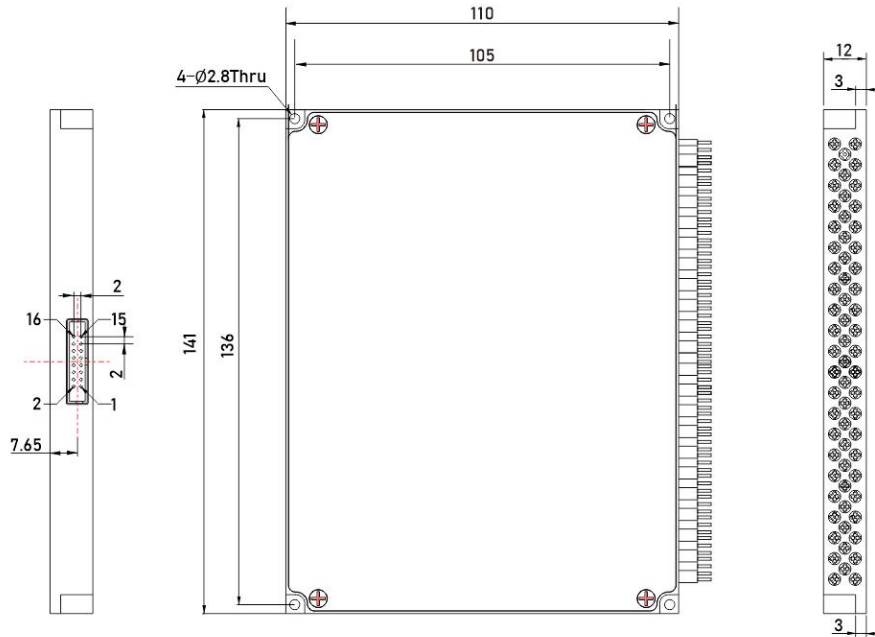


M6:200×180×18mm

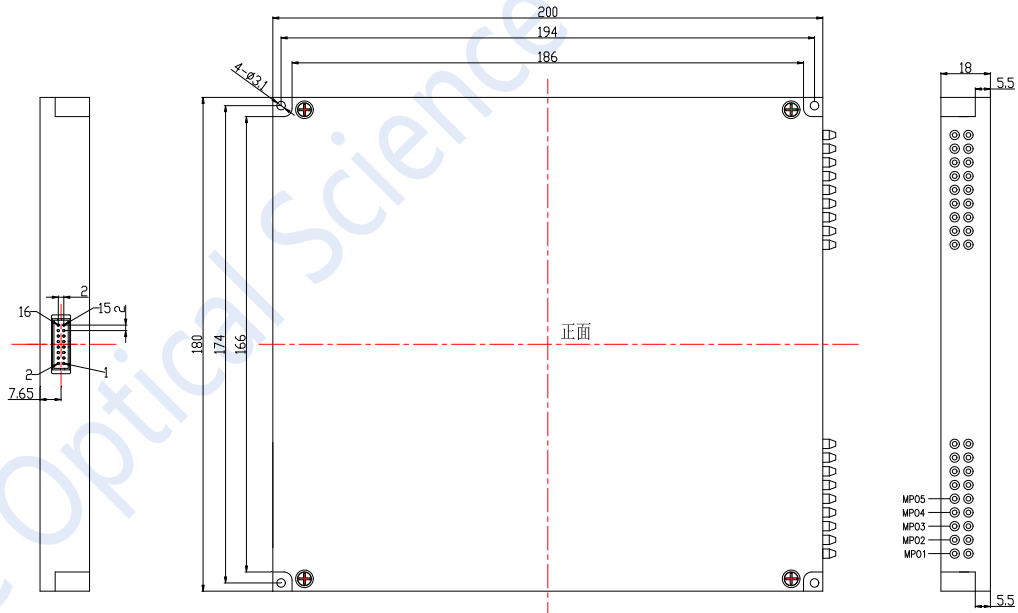




M7: 280×240×32mm

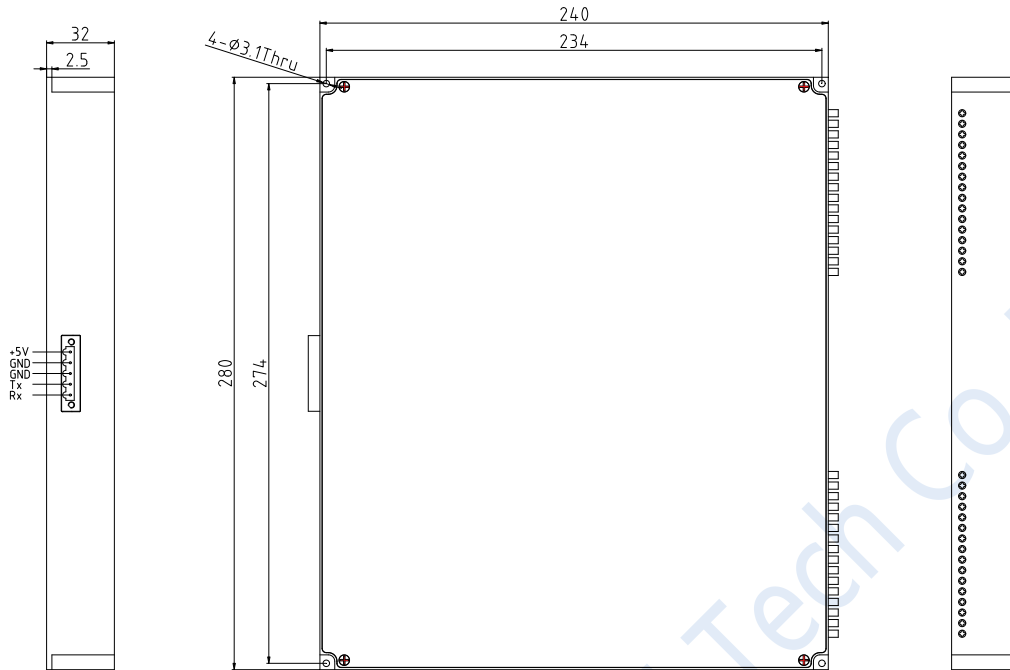

M8: 300X400X60

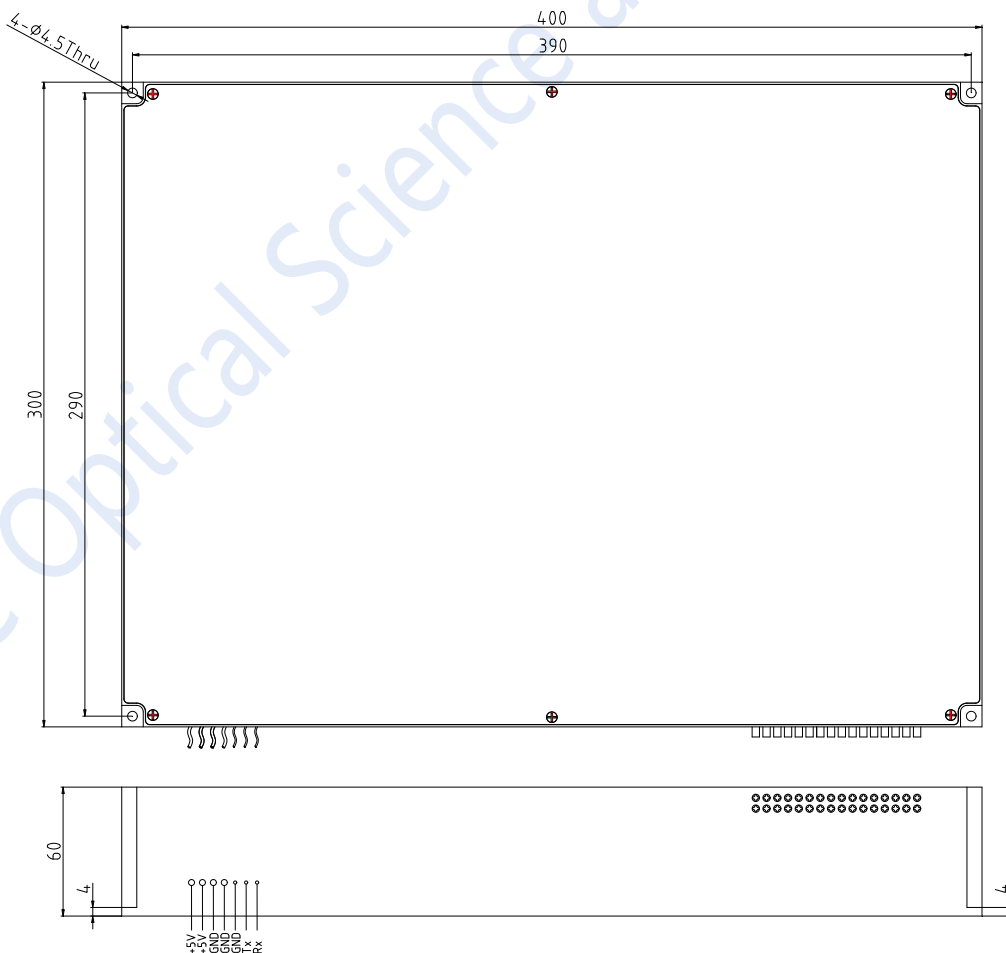



Pin Configurations(M5/M6/M7)

Pin#	Signal name	Type	Description
1	NC		
2	NC		
3	VCC	Power	Power supply, DC 5V, 1.0A
4	VCC	Power	Power supply, DC 5V, 1.0A
5	GND	Power	GND
6	GND	Power	GND
7	NC		
8	NC		
9	TXD	Output	RS232 TX (3.3V TTL)
10	RXD	Input	RS232 RX (3.3V TTL)
11	NC		
12	NC		
13	NC		
14	NC		
15	NC		
16	NC		

Note: The electrical interfaces of M5, M6 and M7 modules should use MOLEX's 87833-1620, and the customer connectors should use MOLEX's 87568-1694.

Pin Configurations(M8)

Pin#	Signal name	Type	电平	Description
1	+5V	I	+5V	+5V 5A 电源
2	+5V	I	+5V	+5V 5A 电源
3	GND	N	N	工作地
4	GND	N	N	工作地
5	GND	N	N	工作地
6	Tx	O	LVTTL	Transmit Data
7	Rx	I	LVTTL	Receive Data



Ordering Information: HC-MEMS M×N-A-B-C-D-E-F-G

A	B	C	D	E	F	G
Mode	Wavelength	Dimension	Fiber Type	Fiber Dimension	Fiber Length	Connector
SM:Single Mode	85:850nm	M5:M5	5:50/125	025:Φ0.25mm	05:0.5m	00: None
MM:Multi-Mode	13:1310nm	M6:M6	6:62.5/125	09:Φ0.9mm	10:1.0m	FP: FC/UPC
	14:1490nm	M7: M7	9:9/125	X:other	15:1.5m	FA: FC/APC
	15:1550nm	M8: M8	X:other		X:other	SP: SC/UPC
	162:1625nm	X:other				SA: SC/APC
	165:1650nm					LP: LC/UPC
	13/15: 1310/1550nm					MP:MPO
	X:other					X:other