

Features

-  Mini Size
-  Fast Switch Speed
-  Low Insertion Loss & PDL
-  Wide Operating Wavelength Range
-  High Reliability & Stability


Applications

-  Network Monitor System
-  Remote Fiber Testing System
-  Module & System Integration
-  Instrumentation

Compliance

-  Telcordia GR-1221
-  Telcordia GR-1073

Optical Route

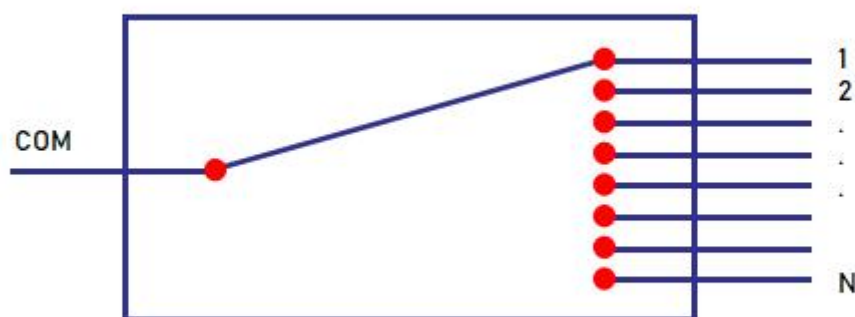

Specifications

Single Mode

Parameters	Unit	MEMS 1×N-SM	
Working Wavelength	nm	O/C/L/L+ band	
Testing Wavelength	nm	1310/1550/1625/1650	
Insertion Loss	dB	@CWL Single-band	@CWL Dual-band
		≤0.8 (N≤8)	≤1.0 (N≤8)
		≤1.0 (8<N≤16)	≤1.2 (8<N≤16)
		≤1.3 (16<N≤32)	≤1.5 (16<N≤32)
		≤1.5 (32<N≤64)	≤1.7 (32<N≤64)
		≤2.0 (64<N≤144)	≤2.2 (64<N≤144)
		≤2.2 (144<N≤256)	≤2.4 (144<N≤256)
WDL	dB	≤0.3 (N≤64) ≤0.4 (64<N≤144) ≤0.5 (144<N≤256)	
PDL	dB	≤0.15	
Return Loss	dB	≥45	
Crosstalk	dB	≥50	
Repeatability	dB	≤±0.05	
Switching Time	ms	≤15	
Durability	times	≥10 ⁹	
Input Optical Power	mW	≤500	
Operating Voltage	V	DC 5V±10%	
Operating Current	mA	≤50 (N≤16)	
		≤250 (16<N≤64)	
		≤350 (64<N≤144)	
		≤500 (144<N≤256)	
Operating Temp.	°C	-20 ~ +85	
Storage Temp.	°C	-40 ~ +85	
Dimension (L×W×H)	mm	M1: 34×24×11 ±0.2 (N≤64, Bare Fiber) M2: 60×24×11 ±0.2 (N≤16, Loose Tube) M3: 90×55×12 ±0.2 (16<N≤64, Loose Tube) M4: 100×100×12 ±0.2 (64<N≤144, Loose Tube) M5: 110×141×12 ±0.2 (144<N≤256, Loose Tube)	

1. Within operating temperature and all SOP.

2. Excluding connector.

3. WDL is measured in a ±20nm range at 23°C.

Multi-Mode

Parameters	Unit	MEMS 1×N-MM	
Working Wavelength	nm	850±30, 1310±30	
Testing Wavelength	nm	850/1310	
Insertion Loss	dB	@CWL Single-band ≤0.8 (N≤12) ≤1.0 (12<N≤16) ≤1.8 (16<N≤128)	@CWL Dual-band ≤1.0 (N≤12) ≤1.2 (12<N≤16) ≤2.0 (16<N≤128)
WDL	dB	≤0.3 (N≤16) ≤0.4 (16<N≤128)	
PDL	dB	≤0.2	
Return Loss	dB	≥30	
Crosstalk	dB	≥30	
Repeatability	dB	≤±0.05	
Switching Time	ms	≤15	
Durability	times	≥10 ⁹	
Input Optical Power	mW	≤500	
Operating Voltage	V	DC 5V±10%	
Operating Current	mA	≤50 (N≤16) ≤250 (16<N≤64) ≤350 (64<N≤128)	
Operating Temp.	°C	-20 ~ +85	
Storage Temp.	°C	-40 ~ +85	
Dimension (L×W×H)	mm	M1: 34×24×11 ±0.2 (N≤16, Bare Fiber) M2: 60×24×11 ±0.2 (N≤16, Loose Tube) M3: 90×55×12 ±0.2 (16<N≤64, Loose Tube) M4: 100×100×12 ±0.2 (64<N≤128, Loose Tube)	


1. Within operating temperature and all SOP.

2. Excluding connector.


3. WDL is measured in a ±20nm range at 23°C.

Dimension(mm)


M1: 34×24×11mm

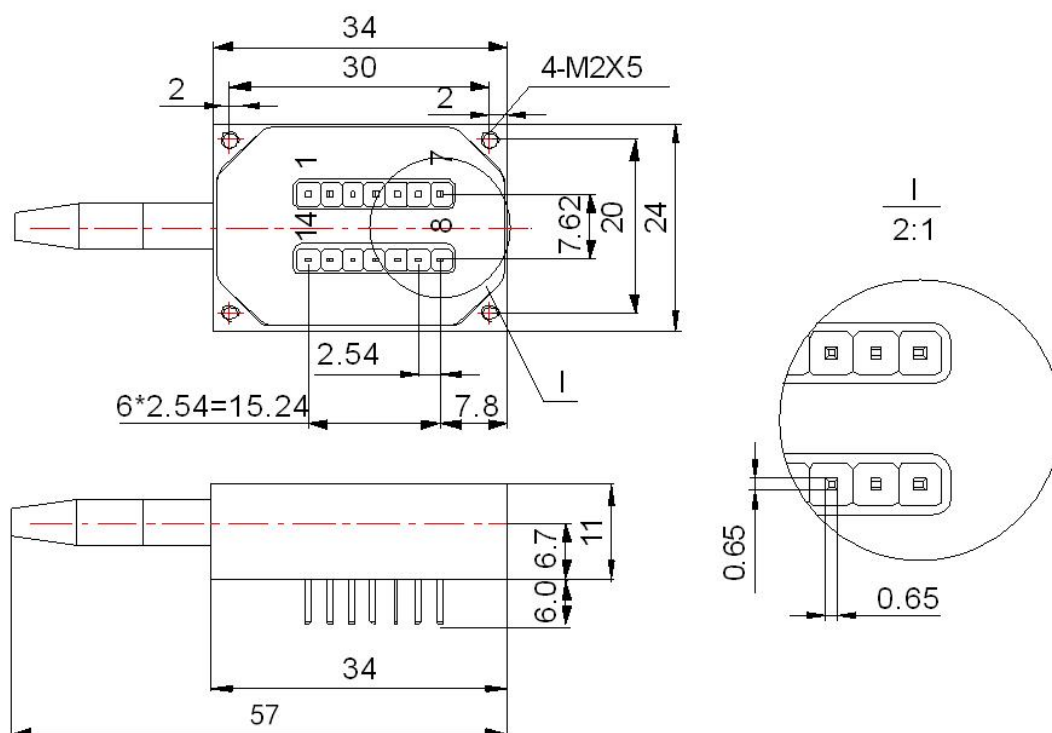


M2: 60×24×11mm

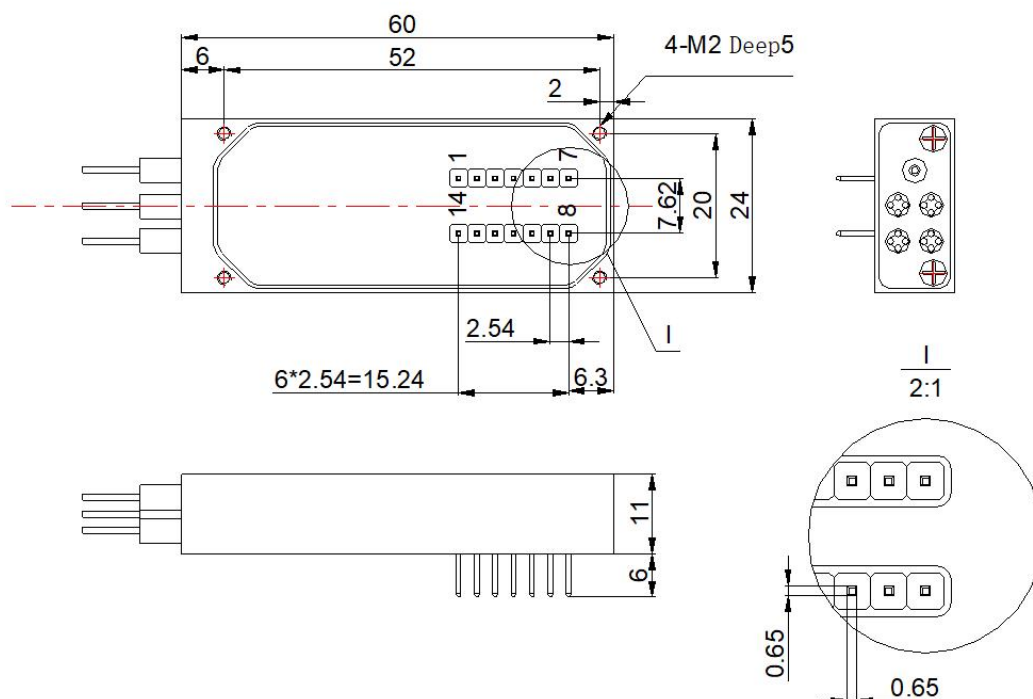


M3: 90×55×12mm

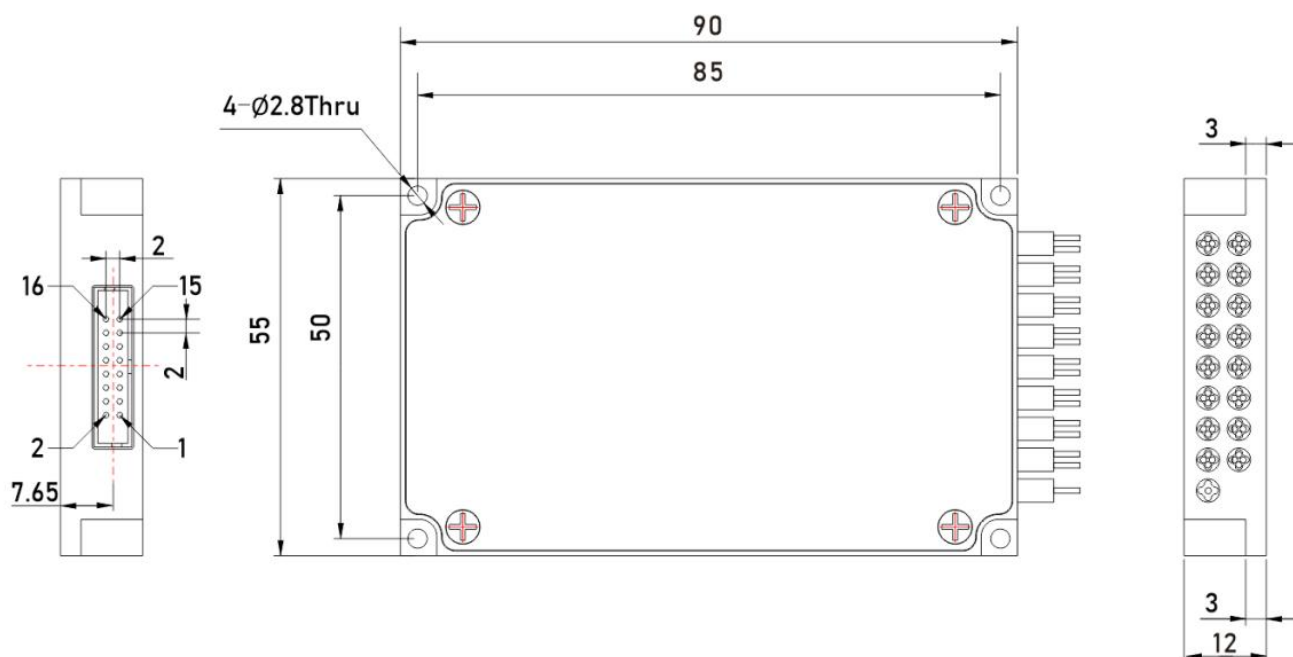

M4: 100×100×12mm

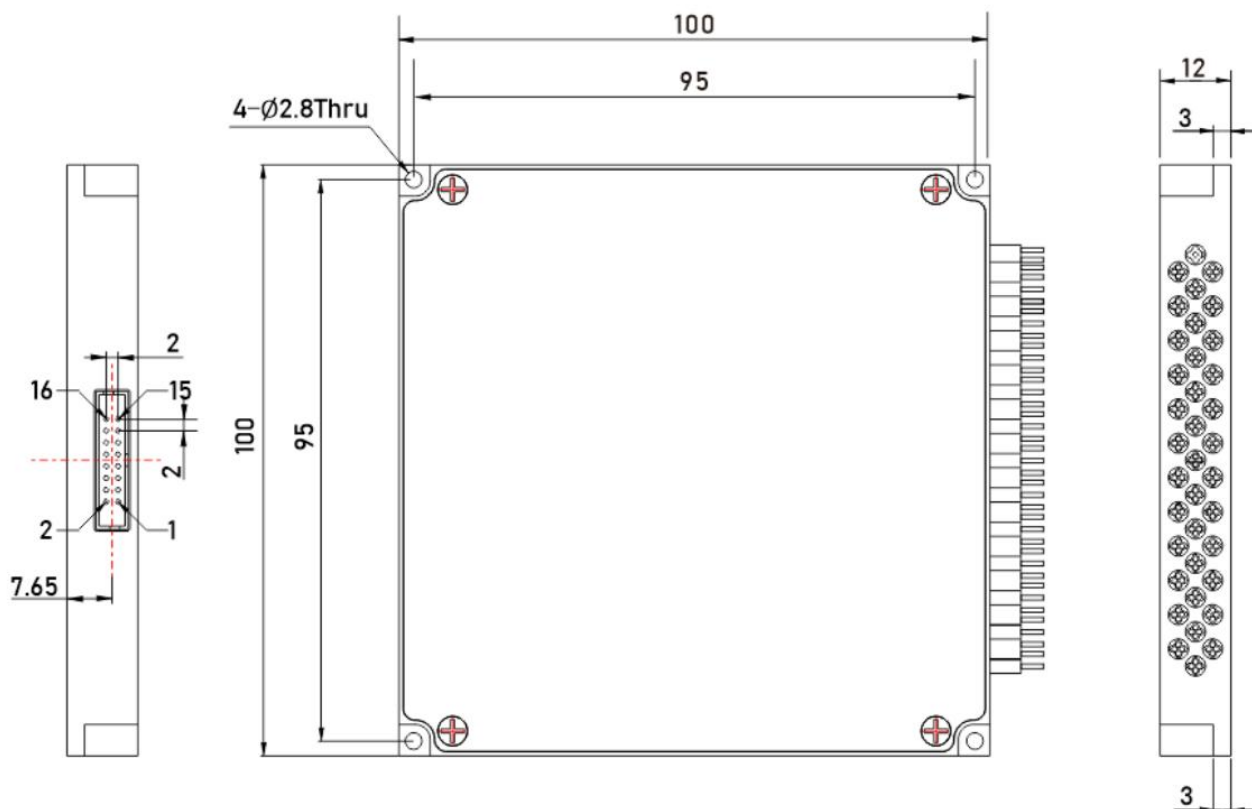

M5: 110×141×12mm

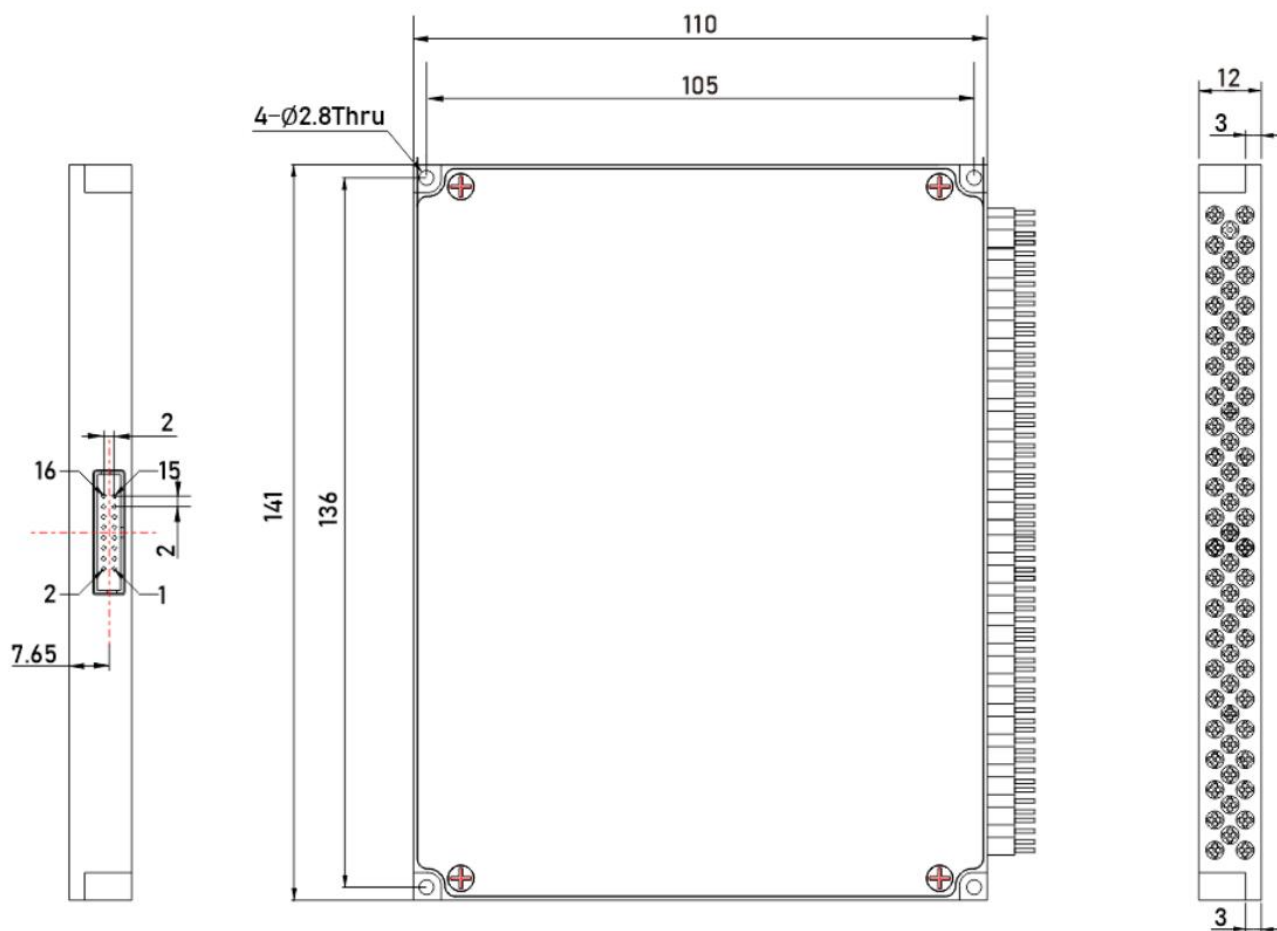

Pin Configurations

Pin No.		Pin Assignment	Signal Type	Description
M1/M2	M3/M4/M5			
5	1	D0	Input	Data bit (D0) (low-order)
	2	D5	Input	Data bit (D5)
2	3	VCC	Power	Power Supply (DC 5V,1.0A)
	4	D7	Input	Data bit (D7) (high-order)
	5	D6	Input	Data bit (D6)
4	6	GND	Power	GND
	7	D4	Input	Data bit (D4)
6	8	D1	Input	Data bit (D1)
9	9	TXD	Output	Data Transmit (TTL Level)
10	10	RXD	Input	Data Receive (TTL Level)
7	11	D2	Input	Data bit (D2)
8	12	D3	Input	Data bit (D3)
12	13	/BUSY	Output	Low level means ready to reset or receiving data
	14	/ALARM	Output	High level means running error
3	15	/STROBE	Input	Falling edge execution data bit
14	16	/RESET	Input	Low level reset to channel 0
11		GND	Power	GND
13		MODE		Low level: data bit control switch. High level: UART control switch
1		NC		No connection

Notes:

1. The electrical interfaces of M3, M4 and M5 modules is Molex 87833-1620. Molex 87568-1694 connector is recommended.
2. Only the serial port is available if the number of channels exceeds 16 when using M1 and M2.

Ordering Information: HC-MEMS-1×N-A-B-C-D-E-F-G

A	B	C	D	E	F	G
Mode	Wavelength	Dimension	Fiber Type	Fiber Dimension	Fiber Length	Connector
S: SingleMode M: Multi-Mode	85:850nm 13:1310nm 14:1490 nm 15:1550 nm 162:1625 nm 165:1650 nm 13/15: 1310/1550 nm X:other	M1:34×24×11 M2:60×24×11 M3:90×55×12 M4:100×100×12 M5:110×141×12 X:other	5:50/125 6:62.5/125 9:9/125 X:other	25:Φ0.25mm 90:Φ0.9mm X:other	05:0.5m 10:1.0m 15:1.5m X:other	00:None FP:FC/UPC FA:FC/APC SP:SC/UPC SA:SC/APC LP:LC/UPC LA:LC/APC MP:MPO X: other