

Features

-  Low Insertion Loss
-  Wide pass band
-  High Channel Isolation
-  High Stability and reliability
-  Epoxy-free on Optical Path

Applications

-  Channel Add/Drop
-  DWDM Network
-  Wavelength Routing
-  Fiber Optical Amplifier
-  CATV fiberoptic System



Specifications


Parameter		4 Channel		8 Channel		16 Channel	
		Mux	Demux	Mux	Demux	Mux	Demux
Channel Wavelength (nm)		ITU 200GHz Grid					
Center wavelength Accuracy (nm)		±0.1					
Channel Spacing (GHz)		200					
Channel Passband (@-0.5dB bandwidth (nm)		>0.5					
Insertion Loss (dB)		≤1.8		≤3.0		≤5. 0	
Channel Ripple (dB)		<0.3					
Isolation (dB)	Adjacent	N/A	>30	N/A	>30	N/A	>30
	Non-adjacent	N/A	>40	N/A	>40	N/A	>40
Inertion Loss Temperature Sensitivity (dB/°C)		<0.005					
Wavelength Temperature Shifting (nm/°C)		<0.002					
Polarization Dependent Loss (dB)		<0.1		<0.1		<0.15	
Polarization Mode Dispersion		<0.1					
Directivity (dB)		>50					
Return Loss (dB)		>45					
Maximum Power Handling (mW)		300					
Opoterating Temperature (°C)		-5~+75					
Storage Temperature (°C)		-40~85					
Package dimension (mm)		L100 x W80 x H10.5				L140 x W115x H18	

* Specifications may change without notice.


Above specification are for device without connector.

 Dimension (Unit:mm)

100×80×10.5mm

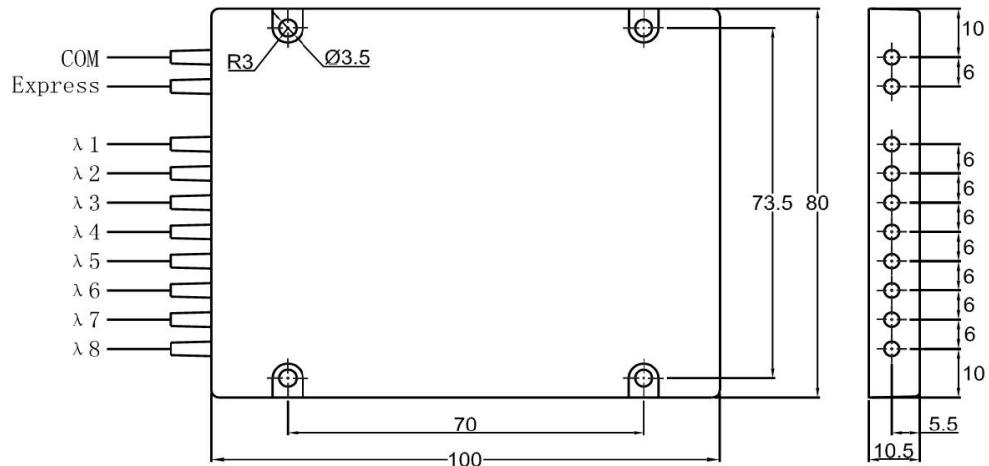

141×115×18mm

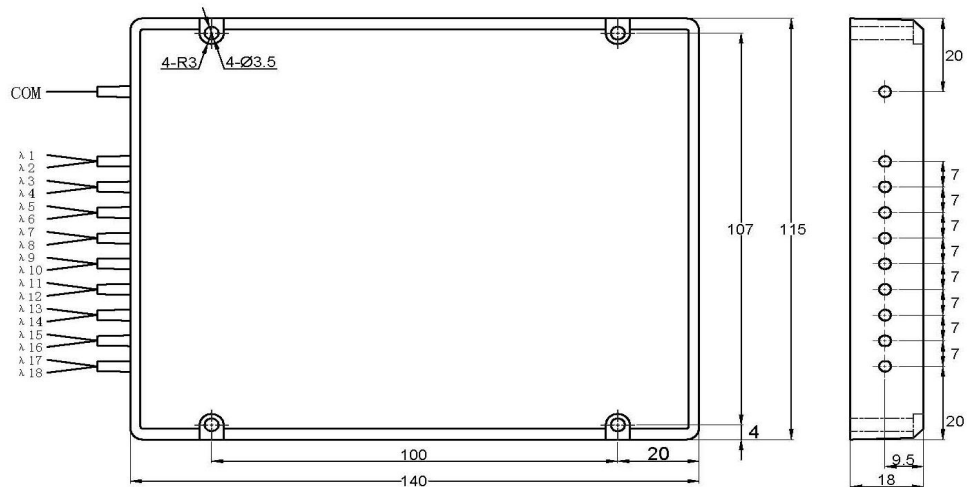

 Ordering Information : HC - DWDM - A - B - C - D - E - F - G

A	B	C	D	E	F	G
Channel Spacing	Number of Channels	Configuration	1st Channel	Fiber Type	Fiber Length	In/Out Connector
2=200GHz	04=4 Channel 08=8 Channel 16=16 Channel	M=Mux D=Demux	21=Ch21 34=Ch34 50=Ch50	1=Bare fiber 2=900um loose tube 3=2mm Cable 4=3mm Cable	1=1m 2=2m S=Specify	0=None 1=FC/APC 2=FC/PC 3=SC/APC 4=SC/PC 5=ST 6=LC S=Specify